

Coherent Perfect Absorption in Cavity Opto-mechanics

G. S. Agarwal¹ and Sumei Huang²

¹*Department of Physics, Oklahoma State University, Stillwater, Oklahoma 74078, USA and*

²*Department of Physics, University of California, Merced, California 95343, USA*

(Dated: April 30, 2013)

We demonstrate the existence of the phenomenon of coherent perfect absorption in a nonlinear dynamically active opto mechanical system. This is in contrast to previous works which considered linear dielectrics. Since we deal with a dynamical system which we treat microscopically we are able to answer previously unanswered question-where the energy resides when coherent perfect absorption occurs. The energy is shared between the cavity field and creation of a coherent phonon and can be extracted by a perturbation of the external fields or by suddenly changing the Q of the cavity.

PACS numbers: 42.25.Hz, 42.50.Wk, 42.65.Sf, 42.25.Bs

In a very interesting paper Wan et. al. [1] discussed the process inverse of lasing in a medium and pointed out that at certain frequencies which are determined by the intrinsic properties of the medium the input light is completely absorbed. This effect has been termed as coherent perfect absorption [CPA] and arises from the interference of waves travelling to the right and left [2, 3]. Many possible applications of CPA in switches, modulators, and filters have been anticipated and hence a variety of systems have been examined for the existence of CPA. Many systems have been shown to exhibit the CPA-these include metamaterials [4], metal dielectric composites and metallic gratings [5], plasmonic nanostructures [6]. We note that while the theory of the laser [7] has been extensively studied using fully microscopic quantum theory which includes effects of nonlinear gain and quantum fluctuations, the corresponding development for CPA is missing. In fact, much of the literature on CPA has concentrated on a linear medium with specified properties i.e., the development assumes the effect of the medium on the propagating fields, however one does not include the dynamical changes in the properties of the medium. Similarly it would be interesting to examine in analogy to laser theory the nonlinear regime of the CPA.

In this letter we examine the possibility of a system which is intrinsically nonlinear and microscopic enough so as to examine above mentioned aspects. Another question of great importance is-where does the energy reside. The CPA results from interference between coherent beams. Thus the question is -is the coherent energy converted to heat or the coherent energy resides in coherent vibrations of the medium. Our microscopic approach shows that the coherent energy indeed gets converted to coherent internal vibrations of the mirror and the cavity field. We consider a system which has been studied in cavity opto mechanics [8, 9]-Here the nonlinearity arises from the radiation pressure interaction between the mirror and the cavity field. The dynamics of the cavity field and the mirror is completely described within the microscopic framework so that one is able to monitor dynamical changes in both the cavity field and

the mechanical mirror. We demonstrate the existence of the CPA in such a mechanical system. We present explicitly conditions on the dissipation of the mirror, the cavity damping and the power of the pump laser to obtain the frequencies at which the CPA occurs. The frequency of the CPA can be tailored by changing the power and the frequency of the coupling field. This is where the nonlinearity of the radiation pressure interaction is useful, and thus our system can be used as a filter of frequencies which in turn would depend on the bandwidth of the incoming pump laser. We also note that since CPA arises from interference, the transmission of fields can be restored by changing the conditions for interference. We note that the opto mechanical systems are truly remarkable as these systems under different conditions exhibit both CPA and lasing behavior [10].

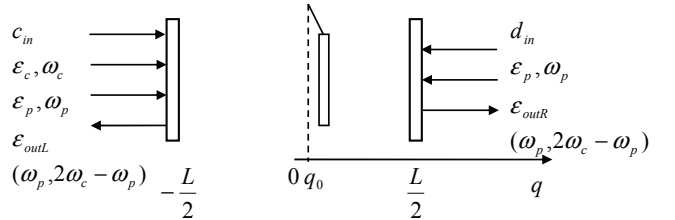


FIG. 1: A double-ended cavity with a moving nanomechanical mirror. The q_0 is the rest position of the moving mirror in the absence of radiation. These incoming fields ϵ_L and ϵ_R can interfere destructively under certain conditions, so that $\epsilon_{outL}(\omega_p) = \epsilon_{outR}(\omega_p) = 0$.

The studied system consists of a partially transmitting movable mirror located around the middle position of the Fabry-Perot cavity formed by two fixed mirrors with finite equal transmission [11], as shown in Fig. 1. The cavity field is driven by a strong coupling field with frequency ω_c and the amplitude ϵ_c from the left-hand side of the cavity. Meanwhile, two weak probe fields with identical frequency ω_p are sent into the cavity from the opposite sides of the cavity, respectively, their complex amplitudes are denoted by ϵ_L and ϵ_R ,

respectively. The movable mirror makes small oscillations under the action of the radiation pressure force exerted by the photons within the cavity. In turn, the mechanical displacement q modifies the cavity resonance frequency, represented by $\omega_0(q)$. We assume that the movable mirror is placed at the node of the frequency $\omega_0(q)$ of the cavity field, thus $\omega_0(q)$ depends linearly on the mechanical displacement q , $\omega_0(q) = \omega_0 + gq$, where ω_0 is the resonance frequency of the cavity in the absence of the moving mirror, the optomechanical coupling rate g depends on the transmission $\mathcal{T}$ of the movable mirror $g = \frac{\sin(2kq_0)}{\sqrt{(1-\mathcal{T})^{-1} - \cos^2(2kq_0)}} \left(-\frac{\omega_0}{L/2}\right)$ [12], where k is the wave vector of the cavity field, q_0 is the rest position of the moving mirror in the absence of radiation. Here, the macroscopic movable mirror is treated as a quantum oscillator with effective mass m and resonance frequency ω_m . The Hamiltonian of the system in the rotating frame at the frequency of the coupling field ω_c is

$$H = \hbar(\omega_0 - \omega_c)c^\dagger c + \hbar g c^\dagger c q + \frac{1}{2}m\omega_m^2 q^2 + \frac{p^2}{2m} + i\hbar\varepsilon_c(c^\dagger - c) + i\hbar(\varepsilon_L c^\dagger e^{-i\delta t} - \varepsilon_L^* c e^{i\delta t}) + i\hbar(\varepsilon_R c^\dagger e^{-i\delta t} - \varepsilon_R^* c e^{i\delta t}), \quad \delta = \omega_p - \omega_c, \quad (1)$$

where c ($c^\dagger$) is the bosonic annihilation (creation) operator of the cavity mode with commutation relation $[c, c^\dagger] = 1$, p is the momentum operator of the movable mirror, the amplitude ε_c of the coupling field is determined by the power $\wp$ of the coupling field $\varepsilon_c = \sqrt{\frac{2\kappa\wp}{\hbar\omega_c}}$, and δ is the detuning between the probe field and the coupling field. It will be more convenient to write the position and momentum operators of the mirror in terms of the annihilation operator (b) and creation operator ($b^\dagger$) of the mirror with $[b, b^\dagger] = 1$, $q = \sqrt{\frac{\hbar}{2m\omega_m}}(b + b^\dagger)$, and $p = i\sqrt{\frac{\hbar m\omega_m}{2}}(b^\dagger - b)$, the Hamiltonian of the system can be rewritten as

$$H = \hbar(\omega_0 - \omega_c)c^\dagger c + \hbar g_0 c^\dagger c(b + b^\dagger) + \hbar\omega_m(b^\dagger b + \frac{1}{2}) + i\hbar\varepsilon_c(c^\dagger - c) + i\hbar(\varepsilon_L c^\dagger e^{-i\delta t} - \varepsilon_L^* c e^{i\delta t}) + i\hbar(\varepsilon_R c^\dagger e^{-i\delta t} - \varepsilon_R^* c e^{i\delta t}), \quad (2)$$

where $g_0 = g\sqrt{\frac{\hbar}{2m\omega_m}}$ is the frequency shift of the cavity field induced by the zero-point motion of the mirror. On including the leakage of photons from the cavity and the thermal fluctuations of the mirror, the quantum Langevin equations for the operators of the mechanical and optical modes, in the Heisenberg picture, are given by

$$\begin{aligned} \dot{b} &= -ig_0 c^\dagger c - i\omega_m b - \frac{\gamma_m}{2}b + \sqrt{\gamma_m}b_{in}, \\ \dot{c} &= -i(\omega_0 - \omega_c)c - ig_0 c(b + b^\dagger) + \varepsilon_c + \varepsilon_L e^{-i\delta t} + \varepsilon_R e^{-i\delta t} - 2\kappa c + \sqrt{2\kappa}c_{in} + \sqrt{2\kappa}d_{in}. \end{aligned} \quad (3)$$

Here γ_m is the mechanical damping rate due to the coupling of the movable mirror to the thermal environment, 2κ is the cavity photon decay rate due to transmission losses through each end mirror of the cavity, b_{in} is the thermal noise on the movable mirror with zero mean value, c_{in} (d_{in}) is the input quantum vacuum noise from the left- (right-) hand side of the cavity with zero mean value.

In the absence of the probe fields ε_L and ε_R , the mean values in the steady state can be obtained from (3) by factorization $\langle cb \rangle = \langle c \rangle \langle b \rangle$ etc,

$$\begin{aligned} \langle b \rangle &= b_s = -\frac{ig_0|c_s|^2}{\frac{\gamma_m}{2} + i\omega_m}, \\ \langle c \rangle &= c_s = \frac{\varepsilon_c}{2\kappa + i\Delta}, \end{aligned} \quad (4)$$

where $\Delta = \omega_0 - \omega_c + g_0(b_s + b_s^*)$ denotes the effective detuning between the cavity field and the coupling field, including the frequency shift caused by the mechanical motion, b_s determines the mechanical displacement at the steady state, and c_s is the cavity field amplitude at the steady state.

To solve the nonlinear coupled equations (3), we write each operator as the sum of the mean value and the small quantum fluctuation around this mean value i.e., $b = b_s + \delta b$ and $c = c_s + \delta c$, where $\delta b \ll |b_s|$ and $\delta c \ll |c_s|$. Inserting them into Eq. (3), keeping only the linear terms, we obtain the linearized quantum Langevin equations

$$\begin{aligned} \delta\dot{b} &= -ig_0(c_s^*\delta c + c_s\delta c^\dagger) - i\omega_m\delta b - \frac{\gamma_m}{2}\delta b + \sqrt{\gamma_m}b_{in}, \\ \delta\dot{c} &= -(2\kappa + i\Delta)\delta c - ig_0c_s(\delta b + \delta b^\dagger) + \varepsilon_L e^{-i\delta t} + \varepsilon_R e^{-i\delta t} + \sqrt{2\kappa}c_{in} + \sqrt{2\kappa}d_{in}. \end{aligned} \quad (5)$$

Moving into another interaction picture by introducing the slowly moving operators with tildes, $\delta\tilde{b} = \delta b e^{-i\omega_m t}$, $\delta\tilde{b}_{in} = \delta b_{in} e^{-i\omega_m t}$, $\delta\tilde{c} = \delta c e^{-i\Delta t}$, $\delta\tilde{c}_{in} = \delta c_{in} e^{-i\Delta t}$, $\delta\tilde{d}_{in} = \delta d_{in} e^{-i\Delta t}$, the linearized quantum Langevin equations become

$$\begin{aligned} \delta\dot{\tilde{b}} &= -ig_0[c_s^*\delta\tilde{c}e^{-i(\Delta-\omega_m)t} + c_s\delta\tilde{c}^\dagger e^{i(\Delta+\omega_m)t}] - \frac{\gamma_m}{2}\delta\tilde{b} + \sqrt{\gamma_m}\tilde{b}_{in}, \\ \delta\dot{\tilde{c}} &= -2\kappa\delta\tilde{c} - ig_0c_s[\delta\tilde{b}e^{-i(\omega_m-\Delta)t} + \delta\tilde{b}^\dagger e^{i(\omega_m+\Delta)t}] + \varepsilon_L e^{-i(\delta-\Delta)t} + \varepsilon_R e^{-i(\delta-\Delta)t} + \sqrt{2\kappa}\tilde{c}_{in} + \sqrt{2\kappa}\tilde{d}_{in}, \end{aligned} \quad (6)$$

If the cavity is driven by a coupling field at the mechanical red sideband $\Delta = \omega_m$, the system is operating in the resolved sideband regime $\omega_m \gg \kappa$, the mirror has a high mechanical quality factor $\omega_m \gg \gamma_m$, and the mechanical frequency ω_m is much larger than $g_0|c_s|$, the fast oscillating terms $e^{\pm 2i\omega_m t}$ in Eq. (6) can be ignored, Eq.

(6) simplifies to

$$\begin{aligned}\dot{\delta\tilde{b}} &= -ig_0c_s^*\delta\tilde{c} - \frac{\gamma_m}{2}\delta\tilde{b} + \sqrt{\gamma_m}\tilde{b}_{in}, \\ \dot{\delta\tilde{c}} &= -2\kappa\delta\tilde{c} - ig_0c_s\delta\tilde{b} + \varepsilon_L e^{-ixt} + \varepsilon_R e^{-ixt} \\ &\quad + \sqrt{2\kappa}\tilde{c}_{in} + \sqrt{2\kappa}\tilde{d}_{in},\end{aligned}\quad (7)$$

where $x = \delta - \omega_m$, the detuning of the probe field from the cavity resonance frequency. Then we examine the expectation values of the small fluctuations, and note that the mean values of the quantum and thermal noise terms are zero, one has

$$\begin{aligned}\langle\dot{\delta\tilde{b}}\rangle &= -ig_0c_s^*\langle\delta\tilde{c}\rangle - \frac{\gamma_m}{2}\langle\delta\tilde{b}\rangle, \\ \langle\dot{\delta\tilde{c}}\rangle &= -2\kappa\langle\delta\tilde{c}\rangle - ig_0c_s\langle\delta\tilde{b}\rangle + \varepsilon_L e^{-ixt} + \varepsilon_R e^{-ixt}.\end{aligned}\quad (8)$$

We assume that the solution to the coupled differential equations Eq. (8) has the following form

$$\langle\delta\tilde{s}\rangle = \delta\tilde{s}_+ e^{-ixt} + \delta\tilde{s}_- e^{ixt}, \quad (9)$$

where $s = b$ or c , $\delta\tilde{s}_+$ and $\delta\tilde{s}_-$ are the components of $\langle\delta\tilde{s}\rangle$ oscillating at $\omega_p - \omega_c$ and $\omega_c - \omega_p$ in the rotating frame at frequency ω_c , respectively. Substituting Eq. (9) into Eq. (8), we obtain

$$\begin{aligned}\delta\tilde{b}_+ &= -\frac{ig_0c_s^*}{\frac{\gamma_m}{2} - ix}\delta\tilde{c}_+, \\ \delta\tilde{c}_+ &= \frac{\varepsilon_L + \varepsilon_R}{2\kappa - ix + \frac{G^2}{\frac{\gamma_m}{2} - ix}},\end{aligned}\quad (10)$$

where $G = g_0|c_s|$ is the effective optomechanical coupling rate, which is related to the power $\wp$ of the coupling field.

The output fields of the two sides of the cavity can be derived by the input-output relations [13]. They yields

$$\begin{aligned}\varepsilon_{outR} + \varepsilon_R e^{-ixt} &= 2\kappa\langle\delta\tilde{c}\rangle, \\ \varepsilon_{outL} + \varepsilon_L e^{-ixt} &= 2\kappa\langle\delta\tilde{c}\rangle.\end{aligned}\quad (11)$$

Similarly, we write the output fields as

$$\begin{aligned}\varepsilon_{outR} &= \varepsilon_{outR+} e^{-ixt} + \varepsilon_{outR-} e^{ixt}, \\ \varepsilon_{outL} &= \varepsilon_{outL+} e^{-ixt} + \varepsilon_{outL-} e^{ixt},\end{aligned}\quad (12)$$

where ε_{outR+} and ε_{outL+} are oscillating at frequency ω_p in the original frame, ε_{outR-} and ε_{outL-} are oscillating at frequency $2\omega_c - \omega_p$ in the original frame. From Eqs. (11) and (12), we obtain the output fields at the probe frequency

$$\begin{aligned}\varepsilon_{outR+} &= 2\kappa\delta\tilde{c}_+ - \varepsilon_R, \\ \varepsilon_{outL+} &= 2\kappa\delta\tilde{c}_+ - \varepsilon_L.\end{aligned}\quad (13)$$

We find if the conditions

$$\begin{aligned}\varepsilon_R &= \varepsilon_L, \\ \gamma_m &= 4\kappa, \\ x &= \omega_p - \omega_c - \omega_m = \pm\sqrt{G^2 - 4\kappa^2}, \quad G \geq 2\kappa, \\ G^2 &= g_0^2 \frac{2\kappa\wp}{\hbar\omega_c(4\kappa^2 + \omega_m^2)},\end{aligned}\quad (14)$$

are satisfied, then the output fields are zero

$$\varepsilon_{outR+} = \varepsilon_{outL+} = 0. \quad (15)$$

Therefore, the input probe fields are fully absorbed by this nonlinear optomechanical system without being reflected or transmitted. This is the result of the destructive interference between the reflected light of say left going probe field and the transmitted light from the probe field on the right. Hence this optomechanical system can achieve CPA. To make $x = \pm\sqrt{G^2 - 4\kappa^2}$ real, the effective coupling rate should be not less than the total cavity photon decay rate, i.e., $G \geq 2\kappa$. For $G = 2\kappa$, the CPA happens at $x = 0$, which means that the probe fields are resonant with the optical cavity. Further, by adjusting the power of the coupling field, the optomechanical system can entirely absorb the incoming two probe fields with equal frequency at $\omega_p = \omega_c + \omega_m \pm \sqrt{G^2 - 4\kappa^2}$. Clearly the transmission can be restored by changing any of the three conditions in Eq. (14). One simple way is by changing the relative phase between ε_L and ε_R .

Next we examine the question where the energy resides when CPA occurs. For this purpose, we examine the intracavity probe photon number $|\delta\tilde{c}_+|^2$ and the quantum excitation $|\delta\tilde{b}_+|^2$ in the movable mirror when the perfect absorption happens. Substituting $\varepsilon_R = \varepsilon_L$, $\gamma_m = 4\kappa$, and $x = \pm\sqrt{G^2 - 4\kappa^2}$ into Eq. (10), we find that the normalized intracavity probe photon number, defined as the ratio of the intracavity probe photon number $|\delta\tilde{c}_+|^2$ versus the intracavity probe photon number $|\frac{\varepsilon_L}{2\kappa}|^2 + |\frac{\varepsilon_R}{2\kappa}|^2$ without the coupling field, is

$$\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{c}_+|^2 = \frac{1}{2}. \quad (16)$$

From Eq. (10), when $\varepsilon_R = \varepsilon_L$, $\gamma_m = 4\kappa$, and $x = \pm\sqrt{G^2 - 4\kappa^2}$, the normalized mechanical excitation is

$$\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{b}_+|^2 = \frac{1}{2}. \quad (17)$$

Therefore, when the perfect absorption occurs, the intracavity probe photon number is equal to the mechanical excitation. Thus the energy of the input probe fields are totally transferred into the cavity field and the movable mirror, which have equal excitation. Further both the cavity mode and the phonon mode are coherently excited.

In the following, we numerically evaluate the output probe photon number, the intracavity probe photon number, and the mechanical excitation to show the effect of the power of the coupling field on CPA. The normalized output probe photon number $|\frac{\varepsilon_{outR+}}{\varepsilon_L}|^2$ ($|\frac{\varepsilon_{outL+}}{\varepsilon_L}|^2$), the normalized probe photon number $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{c}_+|^2$ in the cavity, and the normalized mechanical excitation $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{b}_+|^2$ as a function of the probe detuning x for different effective coupling rates ($G = 2\kappa, 4\kappa, 6\kappa$) are

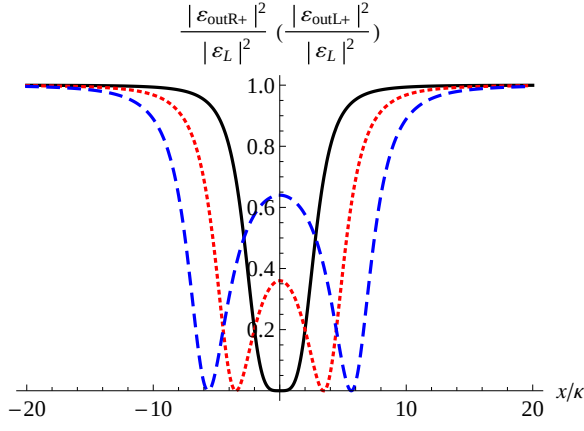


FIG. 2: (Color online) The normalized output probe photon number $\frac{|\varepsilon_{outR+}|^2}{|\varepsilon_L|^2} (\frac{|\varepsilon_{outL+}|^2}{|\varepsilon_L|^2})$ as a function of the probe detuning $x = \omega_p - \omega_c - \omega_m$. The solid, dotted, and dashed curves are for different pumping rates $G = 2\kappa, 4\kappa, 6\kappa$.

shown in Figs. 2-4. For $G = 2\kappa$, it is seen that when $x = 0$, $\varepsilon_{outR+} = \varepsilon_{outL+} = 0$, $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{c}_+|^2 = \frac{1}{2}$, and $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{b}_+|^2 = \frac{1}{2}$. For $G = 4\kappa$ or 6κ , one can see that when $x = \pm\sqrt{G^2 - 4\kappa^2}$, $\varepsilon_{outR+} = \varepsilon_{outL+} = 0$, $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{c}_+|^2 = \frac{1}{2}$, and $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{b}_+|^2 = \frac{1}{2}$. These results are consistent with the analytical results (16) and (17). In addition, in the strong coupling regime $G > 2\kappa$, two dips or two peaks appear in the output probe field, the intracavity probe field, and the mechanical excitation, this is the optomechanical normal mode splitting phenomenon [14, 15] in the pump probe response of the optomechanical system [16] as is seen from Eq. (10) which has poles at $x = \pm G - 2i\kappa$. For $G = 2\kappa$, the width and the location of the poles are comparable and this is the reason for broad structure at $x = 0$ in the mechanical excitation.

In conclusion, we have given one of the first examples of a microscopic nonlinear system, namely, the optomechanical system which can exhibit CPA. We presented explicit results for an optomechanical setup formed by a vibrating mirror within a Fabry-Perot cavity under the action of a strong coupling field. We showed that the energy of the incoming probe fields is shared by the intracavity field and the movable mirror as they propagate through the optomechanical system. Further, we showed that our optomechanical system can absorb the incident probe fields spanning a broad range of frequencies by varying the power and the frequency of the coupling field as long as the optomechanical interaction is not slower than the irreversible processes due to loss of photons out of the cavity mode $G \geq 2\kappa$. This property is clearly useful for filtering out frequencies for example from a probe pulse by using a pump with an appropriate spectral distribution. For the optomechanical system, the absorbed

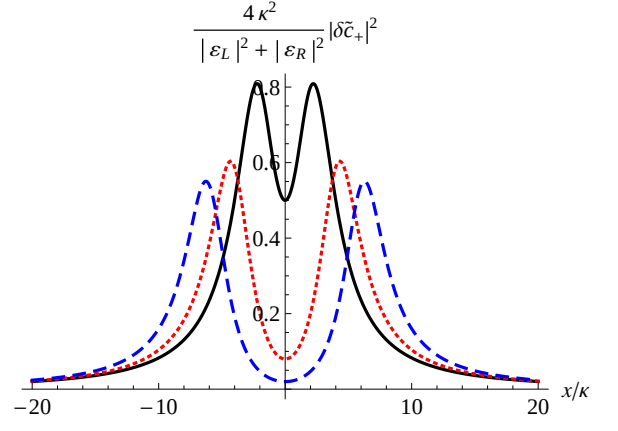


FIG. 3: (Color online) The normalized probe photon number $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{c}_+|^2$ in the cavity as a function of the probe detuning x . The solid, dotted, and dashed curves are for different pumping rates $G = 2\kappa, 4\kappa, 6\kappa$.

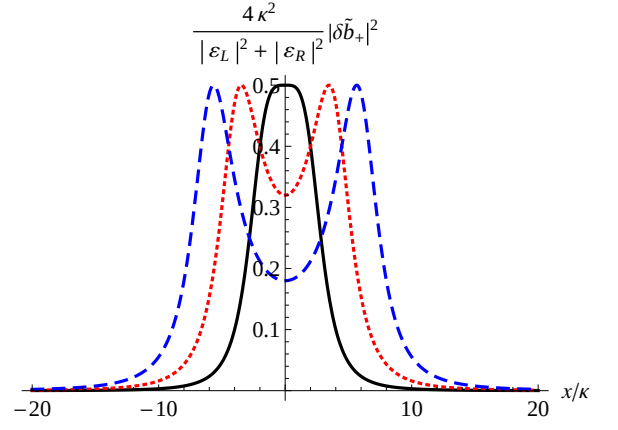


FIG. 4: (Color online) The normalized mechanical excitation $\frac{4\kappa^2}{|\varepsilon_L|^2 + |\varepsilon_R|^2} |\delta\tilde{b}_+|^2$ as a function of the probe detuning x for different pumping rates $G = 2\kappa, 4\kappa, 6\kappa$.

energy is stored in the coherent excitations of the mirror and the cavity, and thus the energy can be extracted by applying external perturbation fields or by suddenly decreasing the cavity quality factor Q .

-
- [1] W. Wan, Y. Chong, L. Ge, H. Noh, A. D. Stone, and H. Cao, Science **331**, 889 (2011). A. Stone, Physics Today, 68 (2011).
 - [2] S. Dutta Gupta, Opt. Lett. **32**, 1483 (2007). Y. D. Chong, L. Ge, H. Cao, and A. D. Stone, Phys. Rev. Lett. **105**, 053901 (2010). C. F. Gmachl, Nature (London) **467**, 37 (2010). S. Longhi, Physics **3**, 61 (2010).
 - [3] An early work [G. S. Agarwal, Phys. Rev. B **8**, 4768 (1973), Sec III] presents general conditions under which all the out fields from a linear dielectric medium vanish.

- In particular explicit conditions for spherical geometries were given. For cylindrical geometries see a recent work - H. Noh, Y. Chong, A. D. Stone, and H. Cao, Phys. Rev. Lett. **108**, 186805 (2012).
- [4] S. Feng and K. Halterman, Phys. Rev. B **86**, 165103 (2012). V. Klimov, S. Sun, and G. Guo, Opt. Express **20**, A13071 (2012). M. Pu, Q. Feng, C. Hu, and X. Luo, Plasmonics **7**, 733 (2012).
 - [5] S. Dutta-Gupta, O. J. F. Martin, S. D. Gupta, and G. S. Agarwal, Opt. Express **20**, 1330 (2012). S. Dutta-Gupta, R. Deshmukh, A. V. Gopal, O. J. F. Martin, and S. D. Gupta, Opt. Letters **37**, 4452 (2012). J. W. Yoon, G. M. Koh, S. H. Song, and R. Magnusson, Phys. Rev. Lett. **109**, 257402 (2012).
 - [6] J. Yoon, K. H. Seol, S. H. Song, and R. Magnusson, Opt. Express **18**, 25702 (2010). J. W. Yoon, W. J. Park, K. J. Lee, S. H. Song, and R. Magnusson, Opt. Express **19**, 20673 (2011). P. Ghenuche, et al., Phys. Rev. Lett. **109**, 143903 (2012).
 - [7] M. Sargent III, M. O. Scully, and W. E. Lamb, Jr., *Laser Physics* (Addison-Wesley, 1974).
 - [8] M. Aspelmeyer, T. J. Kippenberg, and F. Marquardt, arXiv:1303.0733. M. Aspelmeyer, P. Meystre, and K. Schwab, Physics Today **65**, 29 (2012).
 - [9] G. S. Agarwal, *Quantum Optics* (Cambridge University Press, New York, 2012), Chap. 20.
 - [10] F. Massel, T. T. Heikkilä, J.-M. Pirkkalainen, S. U. Cho, H. Saloniemi, P. Hakonen, and M. A. Sillanpää, Nature (London) **480**, 351 (2011). I. S. Grudinin, H. Lee, O. Painter, and K. J. Vahala, Phys. Rev. Lett. **104**, 083901 (2010).
 - [11] J. D. Thompson, B. M. Zwickl, A. M. Jayich, F. Marquardt, S. M. Girvin, and J. G. E. Harris, Nature (London) **452**, 72 (2008).
 - [12] M. Bhattacharya, H. Uys, and P. Meystre, Phys. Rev. A **77**, 033819 (2008).
 - [13] D. F. Walls and G. J. Milburn, *Quantum Optics* (Springer-Verlag, Berlin, 1994), Chap. 7.
 - [14] J. M. Dobrindt, I. Wilson-Rae, and T. J. Kippenberg, Phys. Rev. Lett. **101**, 263602 (2008).
 - [15] S. Gröblacher, K. Hammerer, M. Vanner, and M. Aspelmeyer, Nature (London) **460**, 724 (2009).
 - [16] The pump probe response of optomechanical systems has yielded many interesting effects like electromagnetically induced absorption and transparency [17] which have been extensively studied experimentally [18].
 - [17] G. S. Agarwal and S. Huang, Phys. Rev. A **81**, 041803(R) (2010). K. Qu and G. S. Agarwal, Phys. Rev. A **87**, 031802(R) (2013).
 - [18] S. Weis, et al., Science **330**, 1520 (2010); Q. Lin, et al., Nat. Photon. **4**, 236 (2010); A. H. Safavi-Naeini, et al., Nature (London) **472**, 69 (2011); J. D. Teufel, et al., ibid. **471**, 204 (2011). F. Hocke, et al., New J. Phys. **14**, 123037 (2012).